

# EVOLUTION!


**World's Quickest  
Splicing 6sec  
Tube-heating 9sec**



Single Fiber Fusion Splicer

# Fujikura 70S

Core-to-Core alignment, Dual-axis observation system

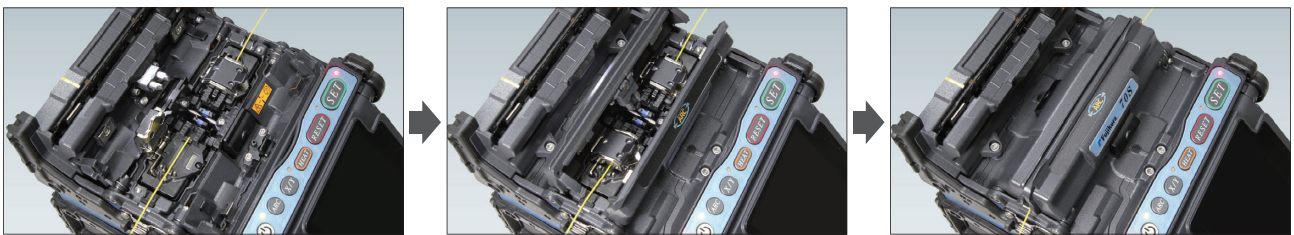

- Automated Wind-Protector.
- Minimum manual operation. Splice in 4 steps.
- Multi-functional carrying case with integrated work station.
- Absolute robustness.



# Fujikura 70S

## SPECIFICATIONS

<b>Applicable fibers</b>	Single / SMF (G.652/657), MMF (G.651), DSF (G.653), NZDSF (G.655)
<b>Cladding dia. / Sheath dia.</b>	80-150µm / 100-3000µm
<b>Cleave length</b>	5mm to 16mm with sheath clamp
<b>Splice mode / heating mode</b>	Total 100 splice modes / 30 heating modes
<b>Splice loss</b>	0.02dB (SM), 0.01dB (MM), 0.04dB (DSF) and 0.04dB (NZDS) Measured by cut-back method relevant to ITU-T and IEC standards.
<b>Attenuation splice function</b>	Intentional high splice loss of 0.1dB to 15dB (0.1dB step) can be made for an in-line fixed attenuator.
<b>Splice time</b>	Typical 6sec ULTRA FAST Typical 7sec SM FAST, Typical 10sec SM AUTO
<b>Tube heating time</b>	Typical 13sec FP-03, coating dia.250µm Typical 14sec FP-03, coating dia.900µm Typical 9sec Slim 60mm, coating dia.250µm
<b>Splice result storage</b>	Last 20,000 splices
<b>Viewing methods / magnification</b>	2 axis CMOS camera with 4.73" color LCD. X / Y (320X magnification), or both X and Y simultaneously (200X magnification)
<b>Tension test</b>	1.96 to 2.25N
<b>Applicable protection sleeve</b>	60mm, 40mm and Fujikura micro sleeves
<b>No. of splice / heating per battery full charge*1</b>	Typical 200 cycles with BTR-09
<b>Electrode life</b>	5000 splices
<b>Size / weight</b>	146W x 159D x 150H (mm) / 2.8kg (including battery)
<b>Operating condition</b>	Altitude : 0 to 5,000m above sea level, Wind : 15m/sec Temperature : -10 to 50deg C, Humidity : 0 to 95%RH, non-dew
<b>Resistance features*2</b>	Shock : 76cm (30inch) all surface drop Dust : Exposure to dust (0.1 to 500µm dia Alumina Silicate), IP5X Rain : H=10mm/hr for 10min, IPX2
<b>Other features</b>	PC software upgrade / data management
<b>Terminals</b>	USB 2.0 (Mini-B type) connector for PC communication. 6-pin Mini-DIN connector for HJS-02 or HJS-03 power supply.

\*1:one(1) splicing and heating cycle per two(2) min. under room temperature condition.

\*2:Carried out in Fujikura labs in Japan. The shock, dust and rain resistance test do not guarantee the product will not be damaged under these conditions.

## ACCESSORIES

Description	Model No.
High precision single fiber cleaver	CT-06 (for single fiber)
High precision fiber cleaver	CT-30 series (for single to 12 ribbon fibers)
Primary coat stripper	PS-02
Nylon jacket stripper	JS-01
Thermal jacket stripper	HJS-02, HJS-03
Protection sleeve	FP-03 / 03 (L=40) and FPS01 series

## OPTIONAL ITEMS

Description	Model No.	SET
Fiber holder	FH-60-250 (coating dia. 250µm)	1pair
	FH-60-900 (coating dia. 900µm)	1pair
	FH-60-DC250 (coating dia. of 250µm in drop cable)	1pair
	FH-FC-20 (coating dia. of 900µm in 2.0mm Sheath dia.)	1pc
	FH-FC-30 (coating dia. of 900µm in 3.0mm Sheath dia.)	1pair
Sheath clamp	CLAMP-S70C (included in standard package)	1pair
	CLAMP-S70D (900µm dia. loose buffer fiber)	1pair
Battery pack	BTR-09 (Li-ion) <sup>3</sup>	1pc
Battery charge cord	DCC-18	1pc
DC power cord	DCC-12 (for cigar-socket)	1pc
	DCC-13 (with alligator clamp)	1pc
Electrodes	ELCT2-20A	1pair
J-Plate	JP-06	1pc

\*3:all senders must to obey the IATA regulation when transporting Li-ion battery by air.

## STANDARD PACKAGE

Description	Model No.	Q'ty
Fusion splicer	70S	1pc
AC adapter	ADC-18	1pc
AC power cord	ACC-XX XX=14 (JP/US), 15 (EU), 16 (UK), 17 (AU)	1pc
Carrying case	CC-30	1pc
Spare electrodes	ELCT2-20A	1pair
Instruction manual CD	M-70 (Manual and PC software)	1pc
Quick reference guide	Q-70S/19S-E (English)	1pc
Warning and cautions	W-70-E	1pc
USB cable	USB-01	1pc
Sleeve loader	SL-01	1pc
Alcohol pot	AP-01	1pc
Screw driver	SD-01	1pc

## STANDARD PACKAGE



Please visit **NEW** web site!

<http://www.fusionsplicer.fujikura.com>



Facebook

<https://www.facebook.com/FujikuraFusionSplicers>



twitter

<https://twitter.com/fujikurasplicer>

Specifications and descriptions are subject to change without prior notice.

## Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan

Phone:+81-3-5606-1164 Fax:+81-3-5606-1534 <http://www.fujikura.com>

## Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967

Phone:+65-6-278-8955 Fax:+65-6-278-0965 <http://www.fujikura.com.sg>

## Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK

Phone:+44-20+8240-2000 Fax:+44-20-8240-2010 <http://www.fujikura.co.uk>

## AFL

260, Parkway East, Duncan, SC29334, USA

Phone:+1-800-235-3423 Fax:+1-800-926-0007 <http://www.aflglobal.com>

## Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA

Phone +86-21-6841-3636 FAX +86-21-6841-2070