


CR25

Cable to Ground Rod
Horizontal cable tap and run
to ground rod

Rod Size		Conductor Size		Metal Powder (g)	Graphite Mould Type	Handle Clamp Type		
A mm	A inch	B mm ²	B mm ²					
14.2;16	5/8	10	10	65	CR25-E-1610	HCC		
		16	16	90	CR25-E-1616	HCC		
		25	25	90	CR25-E-1625	HCC		
		35	35	115	CR25-E-1635	HCC		
		50	50	150	CR25-E-1650	HCC		
		70	70	150	CR25-E-1670	HCC		
		95	95	150	CR25-E-1695	HCC		
		120	120	200	CR25-E-16120	HCC		
		150	150	200	CR25-E-16150	HCC		
		185	185	250	CR25-D-16185	HCD		
		240	240	150x2	CR25-D-16240	HCD		
		172;18	3/4	10	10	90	CR25-E-1810	HCC
				16	16	90	CR25-E-1816	HCC
25	25			115	CR25-E-1825	HCC		
35	35			115	CR25-E-1835	HCC		
50	50			150	CR25-E-1850	HCC		
70	70			150	CR25-E-1870	HCC		
95	95			200	CR25-E-1895	HCC		
120	120			250	CR25-E-18120	HCC		
150	150			250	CR25-E-18150	HCC		
185	185			150x2	CR25-D-18185	HCD		
240	240			150x2	CR25-D-18240	HCD		
300	300			200x2	CR25-D-18300	HCD		

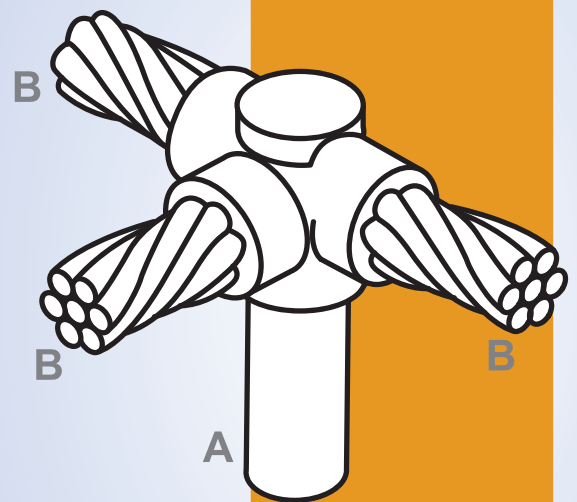

Tools Request :

